

BS100 LED Regolabile



BS100 LED REGOLABILE M1280 4K

Beghelli Code: **40004**

SYSTEM:RD



Description: Lighting

EAN: 8002219749383

ELECTRICAL AND LIGHTING TECHNICAL CHARACTERISTIC

EQUIVALENT POWER: 2x36w

SUPPLY VOLTAGE TYPE: AC

NOMINAL VOLTAGE AC: 230 V

VOLTAGE SUPPLY RANGE AC: 207 V÷253 V

FREQUENCY SUPPLY RANGE: 50 Hz÷60 Hz

POWER FACTOR (Cos ϕ): 0.98

ABSORBED POWER: 53 / 47 / 44 / 39 W

FLUX: 7000 / 6500 / 6000 / 5500 lm

EFFICIENCY: 132 / 138 / 136 / 141 lm/W

Ta: -20 °C÷40 °C

INSULATION CLASS: I

CRI: >80

CCT: 4000 K

COLOR CONSISTENCY (SDCM): SDCM3

LUMINOUS FLUX MAINTENANCE L80/B20: 60000 h

LED NUMBER: 154

DRIVER TYPE: For constant current LED

DRIVER LIFE MTBF: 60000 h

DIMMER TYPE: RD

INRUSH: 12.5 A,0.18 ms

QUANTITY BREAKER: B10 25 , B16 40

QUANTITY BREAKER: C10 25 , C16 40

THD: 20 _

PHOTOBIOLOGICAL RISK: RG0

MOUNTING AND APPLICATIONS

MOUNTING: Ceiling

ENVIRONMENT: Indoor/Outdoor

APPLICATION: Industrial Areas / Production / Warehouses

HACCP: y

MECHANICAL CHARACTERISTICS

Dimension: Height: 95 mm **Length:** 1280 mm **Width:** 170 mm

PRODUCT WEIGHT: 2.3 kg

BODY MATERIAL: Polycarbonate **COLOUR** Grey RAL 7035

COVER / DIFFUSER MATERIAL: Transparent Photoengraved Polycarbonate **FINITURE** Opale

REFLECTOR MATERIAL: Sheet steel **COLOUR** White

PROTECTION DEGREE: IP65


MECHANICAL IMPACTS PROTECTION DEGREE: IK05

GLOW WIRE: 850° - 30s.

QUANTITY PER BOX SINGLE/MULTIPLE/DELIVERY: 1//

CERTIFICATES AND STANDARDS

STANDARDS: CEI EN 60598-2-1, CEI EN 60598-1, EN 62471, 2009/125/CE, 874/2012/CE, 2014/30/EU, 2014/35/EU

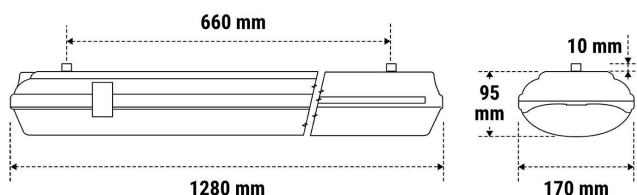


BS100 LED Regolabile



BS100 LED REGOLABILE M1280 4K

SYSTEM:RD

Beghelli Code: **40004**



Accessories to be order separately




3506

BS100/110 K. GANCI ACCIAIO
36W



3504

BS100/110 STAFFE A PARETE



8063

BS100 GRIGLIA PROTEZ
36/58W

8063/1

GR STAFFA UNICA GRIGLIA
8063

Accessories Inverter



19358

INV P&L LED SE/SA 1H 20-60V



19359

INV P&L LED SE/SA 3H 20-60V



19375

MODULO LGFM INVERTER LED



19355L

INV LED AT/LG AR 9W 55V LIFE



19391

INV EXT AT/LG AR 15W 55V
LIFE